


## AGXwE RITE (HP-RECIEVER)

Moderate to severe-to-profound hearing losses  
AGXwE9/AGXwE7/AGXwE5/AGXwE3



### Fitting range

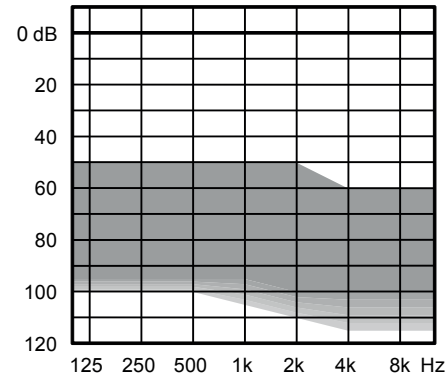

Key Features	AGXwE9	AGXwE7	AGXwE5	AGXwE3
Performance	XXXXXX	XXXXX	XXXX	XX
Processing and fine-tuning channels	15	12	10	6
Adaptation manager	•	•	•	•
Fluid Sound Analyzer (sound classes)	11 (IE)	7 (IE)	4	3
Programs	5	4	3	3
Smartwind Manager	•			
High-frequency boost	•			
Speech Enhancer	RT/IE	IE		
Digital Pinna	•	•		
HD Locator	•	•	•	
TruSound Softener	•	•	•	
SoundSense Adapt	•	•	•	
Preference Control	•	•	•	•
Programmable Push Button*	•	•	•	•
Soft-level noise reduction	•	•	•	•
Noise reduction	•	•	•	•
ZEN IE	•	•	•	•
Audibility Extender	•	•	•	•
<b>Connectivity</b>				
WidexLink compatible	•	•	•	•
DEX assistive listening devices (using WidexLink)**	•	•	•	•
Telecoil	•	•	•	•
<b>Accessories</b>				
TONELINK App	•	•	•	•
COM-DEX App	•	•	•	•

\*Preference Control, program shift or a combination of the two


\*\*Compatible with the following: CALL-DEX, TV-DEX, COM-DEX, UNI-TEX, RC-DEX, FM+ DEX, PHONE-DEX II

**TECHNICAL DATA**


		<b>EAR SIMULATOR</b> IEC 60118-0:1983, + A1:1994	<b>2CC COUPLER</b> IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	130 dB SPL 137 dB SPL 132 dB SPL	120 dB SPL 132 dB SPL 126 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	115 dB SPL 121 dB SPL 113 dB SPL	105 dB SPL 112 dB SPL 109 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz Peak Average	76 dB SPL 84 dB SPL 75 dB SPL	67 dB SPL 74 dB SPL 70 dB SPL
Telecoil output (Input 31.6 mA/m)		115 dB SPL 121 dB SPL 113 dB SPL	105 dB SPL 112 dB SPL 109 dB SPL
Acoustic Frequency range		100 Hz - 6000 Hz	100 Hz - 5800 Hz
Harmonic distortion (Typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		21 dB SPL	21 dB SPL
Battery drain (stand by)		1.01 mA	1.01 mA
Battery drain*		1.08 mA	1.12 mA
Battery life / hours (Type 312 Zn-Air, 170 mAh)*		155 h	150 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -33/-9/-3 dB SPL	U-rating: M4/T4

\*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


**MAXIMUM OUTPUT - EAR SIMULATOR**

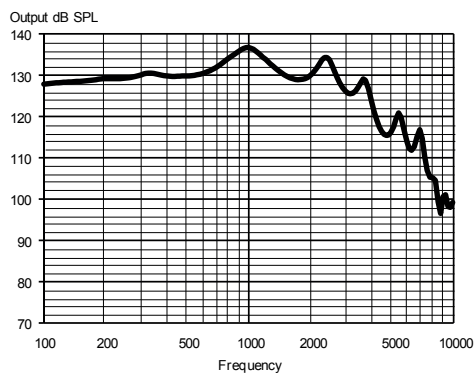


**MAXIMUM OUTPUT - 2CC COUPLER**

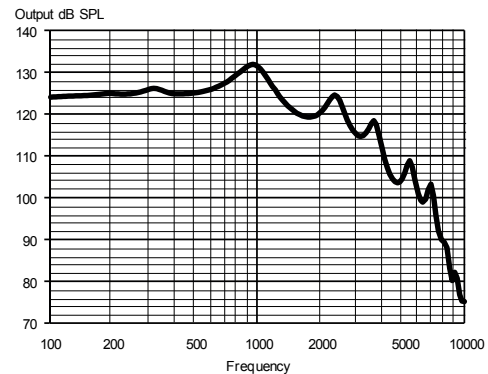

**OUTPUT - EAR SIMULATOR**

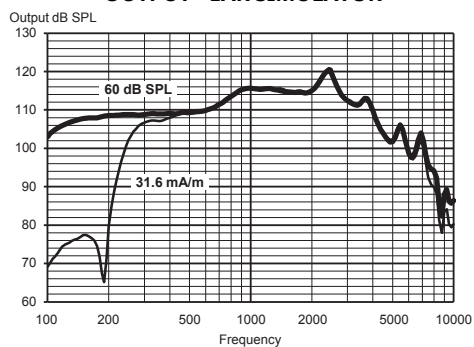

**OUTPUT - 2CC COUPLER**

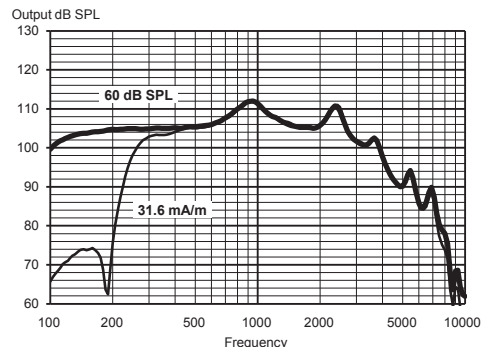

Do not modify this equipment without authorization of the manufacturer.  
Spare parts and instructions for correct repair can be acquired from Audigy.