


AMRR2D V.2 mRIC R D (M-Receiver)

Hearing loss from mild-to-moderate
Philharmonie/Symphonie/Concerto/Prelude



Fitting range

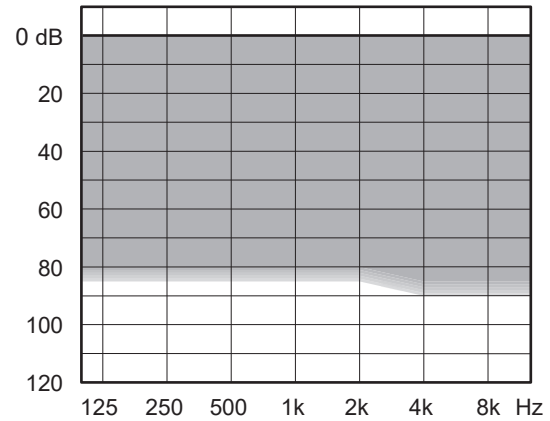

| Key Features | Philharmonie | Symphonie | Concerto | Prelude |
|--------------------------------------|--------------|-----------|----------|---------|
| Performance | XXXXXX | XXXXX | XXXX | XX |
| Processing and fine-tuning channels | 15 | 12 | 10 | 6 |
| Adaptation manager | • | • | • | • |
| Fluid Sound Analyser (sound classes) | 11 (IE) | 7 (IE) | 4 | 3 |
| Programs | 5 | 4 | 3 | 3 |
| Smartwind Manager | • | | | |
| High-frequency boost | • | | | |
| Speech Enhancer | RT/IE | IE | | |
| Digital Pinna | • | • | | |
| HD Locator | • | • | • | |
| TruSound Softener | • | • | • | |
| SoundSense Adapt | • | • | • | |
| Preference Control | • | • | • | • |
| Soft-level noise reduction | • | • | • | • |
| Noise reduction | • | • | • | • |
| ZEN IE | • | • | • | • |
| Audibility Extender | • | • | • | • |
| Connectivity | | | | |
| 2.4 GHz control (Android and iOS) | • | • | • | • |
| 2.4 GHz audio streaming (iOS)* | • | • | • | • |
| Accessories | | | | |
| DEX assistive listening devices* | • | • | • | • |
| TONELINK App | • | • | • | • |
| COM-DEX App | • | • | • | • |


*Compatible with the following: CALL-DEX, TV-DEX, COM-DEX, UNI-DEX, RC-DEX, FM+ DEX, PHONE-DEX

TECHNICAL DATA


| | | EAR SIMULATOR IEC 60118-0:1983, + A1:1994 | 2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014 |
|---|-----------------------------|--|--|
| OSPL90 | 1600 Hz Peak Average | 122 dB SPL 128 dB SPL 120 dB SPL | 113 dB SPL 117 dB SPL 114 dB SPL |
| Acoustic output (Input 60 dB SPL) | 1600 Hz Peak Average | 107 dB SPL 114 dB SPL 100 dB SPL | 98 dB SPL 103 dB SPL 97 dB SPL |
| Full-on gain (Input 50 dB SPL) | 1600 Hz Peak Average | 67 dB SPL 69 dB SPL 64 dB SPL | 58 dB SPL 61 dB SPL 57 dB SPL |
| Acoustic Frequency range | | 100 Hz - 10000 Hz | 100 Hz - 9200 Hz |
| Harmonic distortion (Typical) | 500 Hz 800 Hz 1600 Hz | <2% <2% <2% | <2% <2% <2% |
| Equivalent input noise | | 19 dB SPL | 20 dB SPL |
| Battery drain (stand by) | | 1.18 mA | 1.18 mA |
| Battery drain* | | 1.25 mA | 1.28 mA |
| Battery life* Rechargeable lithium-ion battery* | | 40 h | 40 h |
| Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011) | | IRIL: -29/-26/-8 dB SPL | U-rating: M4 |

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


MAXIMUM OUTPUT - EAR SIMULATOR

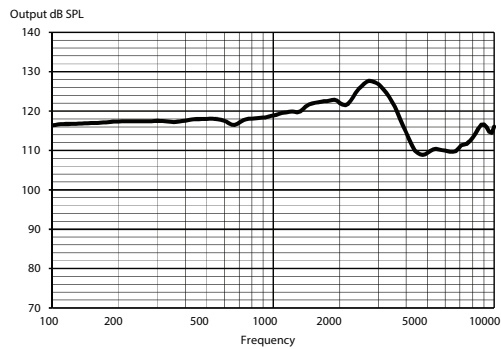

MAXIMUM OUTPUT - 2CC COUPLER

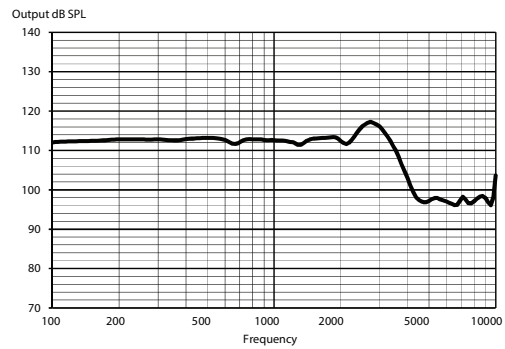

OUTPUT - EAR SIMULATOR

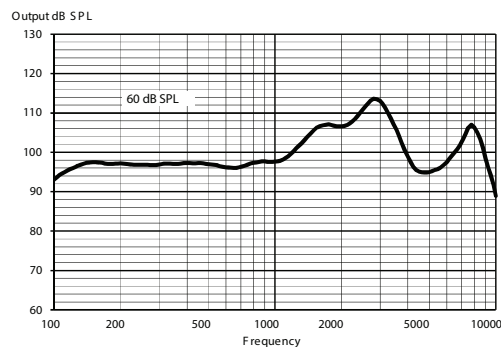

OUTPUT - 2CC COUPLER

