


AGXwE RIC (S-RECIEVER)

Minimal to severe hearing losses
AGXwE9/AGXwE7/AGXwE5



Fitting range

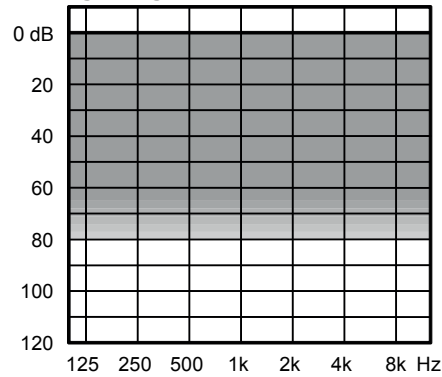

Key Features	AGXwE9	AGXwE7	AGXwE5
Performance	XXXXXX	XXXXX	XXXX
Processing and fine-tuning channels	15	12	10
Adaptation manager	•	•	•
Fluid Sound Analyzer (sound classes)	11 (IE)	7 (IE)	4
Programs	5	4	3
Smartwind Manager	•		
High-frequency boost	•		
Speech Enhancer	RT/IE	IE	
Digital Pinna	•	•	
HD Locator	•	•	•
TruSound Softener	•	•	•
SoundSense Adapt	•	•	•
Preference Control	•	•	•
Programmable Push Button*	•	•	•
Soft-level noise reduction	•	•	•
Noise reduction	•	•	•
ZEN IE	•	•	•
Audibility Extender	•	•	•
Connectivity			
2.4 GHz control (Android and iOS)	•	•	•
2.4 GHz control (iOS)	•	•	•
WidexLink compatible	•	•	•
DEX assistive listening devices (using WidexLink)**	•	•	•
Telecoil	•	•	•
Accessories			
EVOKE App with SoundSense Learn	•	•	•
TONELINK App	•	•	•
COM-DEX App	•	•	•

*Preference Control, program shift or a combination of the two


**Compatible with the following: CALL-DEX, TV-DEX, COM-DEX, UNI-TEX, RC-DEX, FM+ DEX, PHONE-DEX II

TECHNICAL DATA


		EAR SIMULATOR	2CC COUPLER
		IEC 60118-0:1983, + A1:1994	IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz	110 dB SPL	101 dB SPL
	Peak	118 dB SPL	107 dB SPL
	Average	111 dB SPL	103 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz	95 dB SPL	86 dB SPL
	Peak	103 dB SPL	92 dB SPL
	Average	92 dB SPL	86 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz	58 dB SPL	49 dB SPL
	Peak	62 dB SPL	52 dB SPL
	Average	57 dB SPL	50 dB SPL
Telecoil output (Input 31.6 mA/m)	1600 Hz	95 dB SPL	86 dB SPL
	Peak	103 dB SPL	92 dB SPL
	Average	92 dB SPL	86 dB SPL
Acoustic Frequency range		100 Hz - 10000 Hz	100 Hz - 8450 Hz
Harmonic distortion (Typical)	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		23 dB SPL	23 dB SPL
Battery drain (stand by)		1.00 mA	1.00 mA
Battery drain*		1.02 mA	1.04 mA
Battery life / hours (Type 312 Zn-Air, 170 mAh)* (Type 312 rechargeable, 40 mAh)*		165 h	165 h
		40 h	40 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -25/-21/-14 dB SPL	U-rating: M4/T4

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


MAXIMUM OUTPUT - EAR SIMULATOR

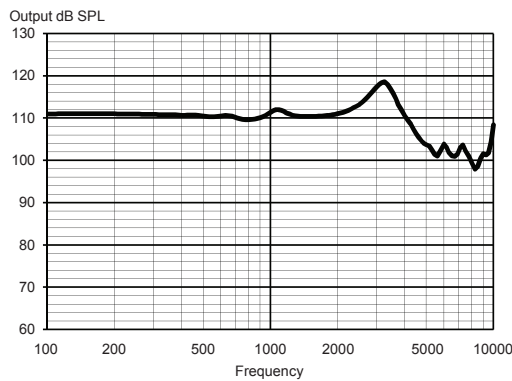

MAXIMUM OUTPUT - 2CC COUPLER

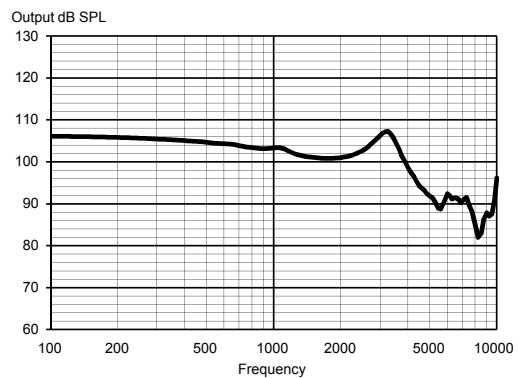

OUTPUT - EAR SIMULATOR

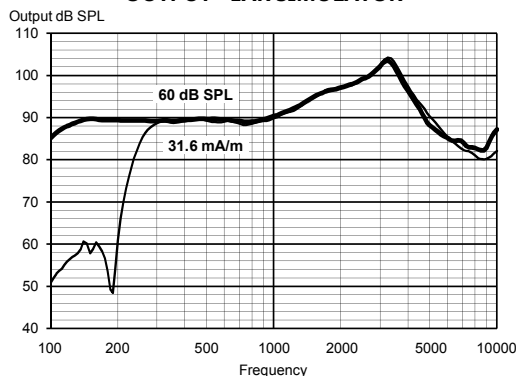

OUTPUT - 2CC COUPLER

