


## AGXwE RIC (M-RECIEVER)

Minimal to severe hearing losses  
AGXwE9/AGXwE7/AGXwE5



### Fitting range

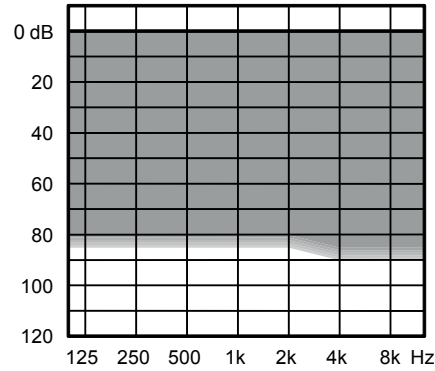

Key Features	AGXwE9	AGXwE7	AGXwE5
Performance	XXXXXX	XXXXX	XXXX
Processing and fine-tuning channels	15	12	10
Adaptation manager	•	•	•
Fluid Sound Analyzer (sound classes)	11 (IE)	7 (IE)	4
Programs	5	4	3
Smartwind Manager	•		
High-frequency boost	•		
Speech Enhancer	RT/IE	IE	
Digital Pinna	•	•	
HD Locator	•	•	•
TruSound Softener	•	•	•
SoundSense Adapt	•	•	•
Preference Control	•	•	•
Programmable Push Button*	•	•	•
Soft-level noise reduction	•	•	•
Noise reduction	•	•	•
ZEN IE	•	•	•
Audibility Extender	•	•	•
<b>Connectivity</b>			
2.4 GHz control (Android and iOS)	•	•	•
2.4 GHz control (iOS)	•	•	•
WidexLink compatible	•	•	•
DEX assistive listening devices (using WidexLink)**	•	•	•
Telecoil	•	•	•
<b>Accessories</b>			
EVOKE App with SoundSense Learn	•	•	•
TONELINK App	•	•	•
COM-DEX App	•	•	•

\*Preference Control, program shift or a combination of the two


\*\*Compatible with the following: CALL-DEX, TV-DEX, COM-DEX, UNI-TEX, RC-DEX, FM+ DEX, PHONE-DEX II

**TECHNICAL DATA**


		<b>EAR SIMULATOR</b> IEC 60118-0:1983, + A1:1994	<b>2CC COUPLER</b> IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	118 dB SPL 124 dB SPL 118 dB SPL	108 dB SPL 114 dB SPL 110 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	103 dB SPL 108 dB SPL 99 dB SPL	93 dB SPL 98 dB SPL 93 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz Peak Average	61 dB SPL 69 dB SPL 62 dB SPL	52 dB SPL 58 dB SPL 55 dB SPL
Telecoil output (Input 31.6 mA/m)		103 dB SPL 108 dB SPL 99 dB SPL	93 dB SPL 98 dB SPL 93 dB SPL
Acoustic Frequency range		100 Hz - 10000 Hz	100 Hz - 7000 Hz
Harmonic distortion (Typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		21 dB SPL	21 dB SPL
Battery drain (stand by)		1.00 mA	1.00 mA
Battery drain*		1.02 mA	1.04 mA
Battery life / hours (Type 312 Zn-Air, 170 mAh)* (Type 312 rechargeable, 40 mAh)*		165 h 40 h	165 h 40 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -21/-19/-9 dB SPL	U-rating: M4/T4

\*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


**MAXIMUM OUTPUT - EAR SIMULATOR**

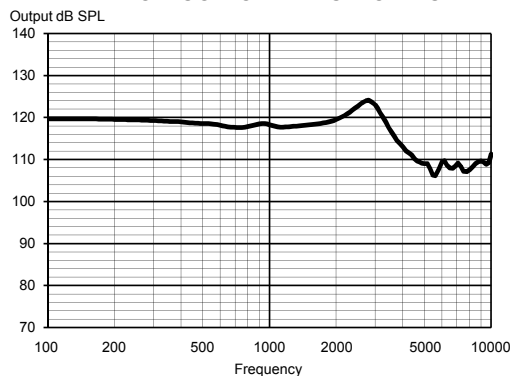


**MAXIMUM OUTPUT - 2CC COUPLER**

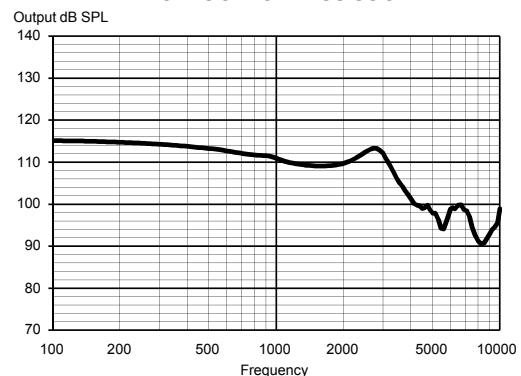

**OUTPUT - EAR SIMULATOR**

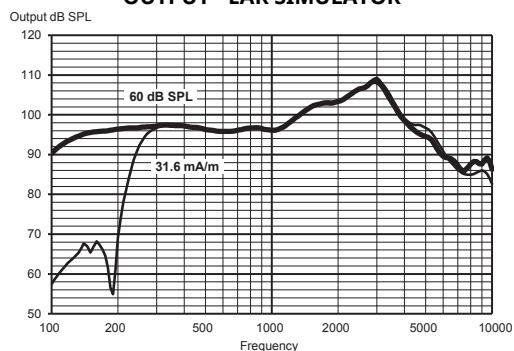

**OUTPUT - 2CC COUPLER**

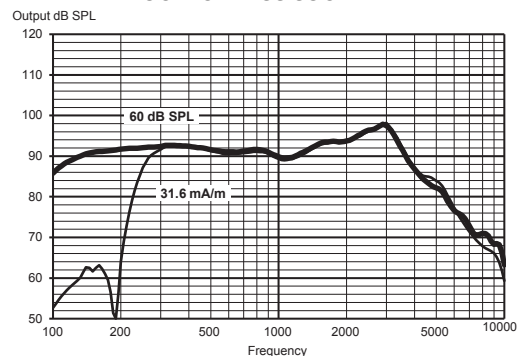

Do not modify this equipment without authorization of the manufacturer.  
Spare parts and instructions for correct repair can be acquired from Audigy.