

## GrandAudition RITE with HP-receiver


### 4 Performance levels



The GrandAudition RITE is based upon the E-Platform with a Sound Class controller that handles automatic processing more accurately and faster than before. The GrandAudition RITE use smart technology that learn from the users' preferences and help guide them to a better, more personalised sound. The RITE has an optional ZPower rechargeable solution

- Multiple wireless connectivity via Apps and DEX assistive listening devices
- Uses an HP-receiver
- Uses a size 312 battery
- Protection class IP68 (only non-rechargeable solution)
- Moderate to severe-to-profound hearing losses

### SUGGESTED FITTING RANGE

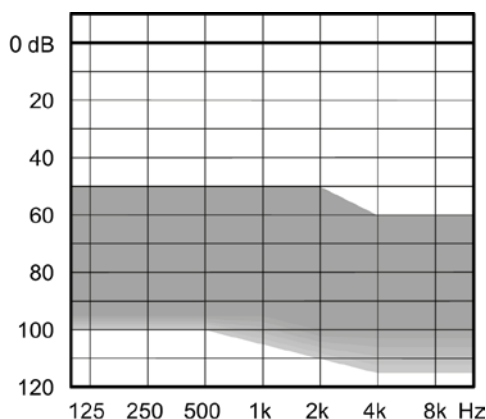

### STANDARD TECHNOLOGY


- E-platform with with Sound Class Controller
- Improved open-fit rationales
- Acclimatisation rationales
- Power Saver IV technology: Low current consumption

FEATURES	440	330	220	110
Performance	★★★★★★	★★★★★★	★★★★	★★
Platform	E	E	E	E
SoundSense Adapt	•	•	•	
Adaption manager	•	•	•	•
High-frequency boost	•			
Wind noise reduction	•			
Speech Enhancer RT	RT/IE	IE		
Digital Pinna	•	•		
TruSound Softener	•	•	•	
Soft-level noise reduction	•	•	•	•
Noise Reduction	•	•	•	•
Sound Class Technology 2	11 (IE)	7 (IE)	4	3
HD Locator	•	•	•	
Programs	5	4	3	3
Programmable Push Button*	•	•	•	•
ZEN IE	•	•	•	•
Audibility Extender	•	•	•	•
Preference Control	•	•	•	•
Telecoil	•	•	•	•
ACCESSORIES	440	330	220	110
TONELINK App	•	•	•	•
COM-DEX App	•	•	•	•
DEX assistive listening devices	•	•	•	•
Multiple earware options	•	•	•	•


\*Programmable: Preference Control, program shift or a combination of the two

\*\*Also includes DEX assistive listening devices: CALL-DEX, TV-DEX, COM-DEX, UNI-DEX, RC-DEX, FM+ DEX, PHONE-DEX


### MAXIMUM OUTPUT - EAR SIMULATOR IEC 60118-0

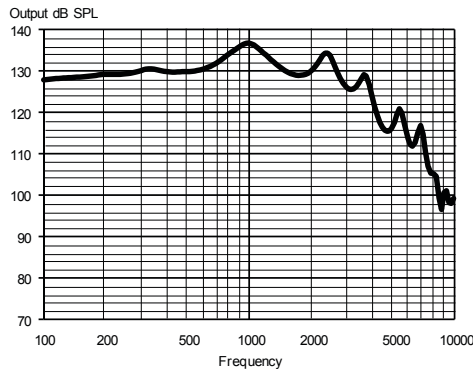


### MAXIMUM OUTPUT - 2CC COUPLER IEC 60118-7 / ANSI S3.22-2009

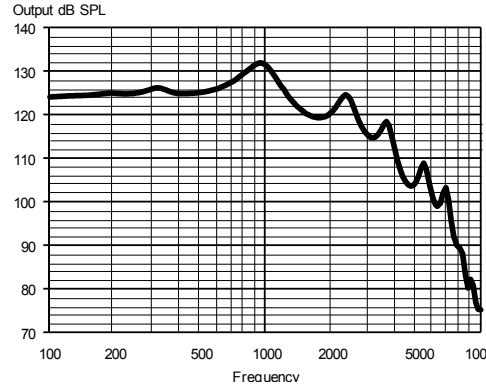

### OUTPUT - EAR SIMULATOR IEC 60118-0

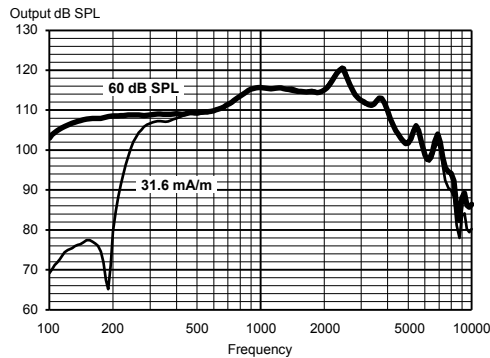

### OUTPUT - 2CC COUPLER IEC 60118-7 / ANSI S3.22-2009

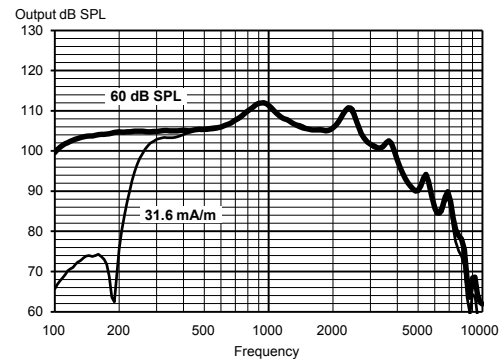

**Technical data** Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact GrandAudition.

		<b>EAR SIMULATOR IEC 60118-0:1983 + A1:1994</b>	<b>2CC COUPLER IEC 60118-0:2015 / ANSI S3.22-2014</b>
OSPL90	1600 Hz Peak Average	130 dB SPL 137 dB SPL 132 dB SPL	120 dB SPL 132 dB SPL 126 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	115 dB SPL 121 dB SPL 113 dB SPL	105 dB SPL 112 dB SPL 109 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz Peak Average	76 dB 84 dB 75 dB	67 dB 74 dB 70 dB
Telecoil output (Input 31.6 mA/m)	1600 Hz Peak Average	115 dB SPL 121 dB SPL 113 dB SPL	105 dB SPL 112 dB SPL 109 dB SPL
Acoustic frequency range		100 Hz - 6000 Hz	100 Hz - 5800 Hz
Harmonic distortion (typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		21 dB SPL	21 dB SPL
Battery drain (stand by)		1.01 mA	1.01 mA
Battery drain*		1.08 mA	1.12 mA
Battery life (Type 312 Zn-Air, 170 mAh)* (Type 312 rechargeable, 40 mAh)		155 h 35 h	150 h 35 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -33/-9/-3 dB SPL	U-rating: M4/T4

\*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.