

GrandAudition MINI-RIC WITH M-RECEIVER

2 Performance levels: Sérénité/accès




The GrandAudition MINI-RIC is based upon the U-Platform with Sound Class Technology for automated classification of sound environments and optimal sound processing determined by the sound classes. Wireless connectivity and compatible with the DEX assistive listening devices.

Uses a size 10 battery.


Minimal to severe hearing losses.

FEATURES	Sérénité	accès
Performance	★★★	★
Platform	U	U
High-frequency boost		
Wind noise attenuation/control	N/Y	N/Y
Speech Enhancer	•	
Focus setting		
Digital Pinna	•	
TruSound Softener	•	•
Noise Reduction	•	•
Sound Class Technology	5 (IE)	1
HD Locator	in channels	Broadband
Programs	4	3
ZEN	IE	IE
Audibility Extender	•	•
Compression	•	•
SmartSpeak/SmartTone	•	•
Protection Class IP58	•	•
ACCESSORIES	Sérénité	accès
App for iPhone, Android and new functionality	Via COM-DEX	Via COM-DEX
DEX accessories	•	•
Multiple earware options	•	•


SUGGESTED FITTING RANGE

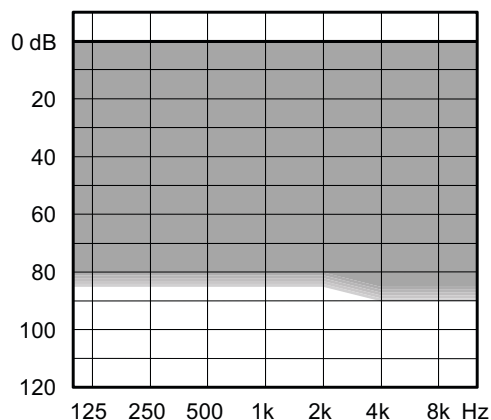


MAXIMUM OUTPUT - EAR SIMULATOR IEC 60118-0

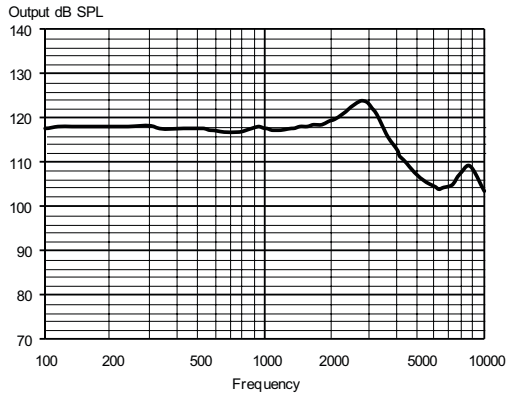


MAXIMUM OUTPUT - 2CC COUPLER IEC 60118-7 / ANSI S3.22-2009

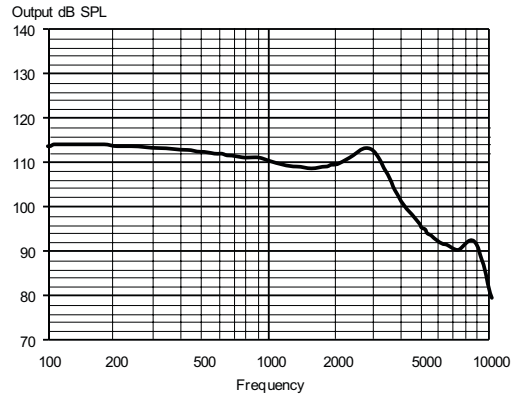

OUTPUT - EAR SIMULATOR IEC 60118-0

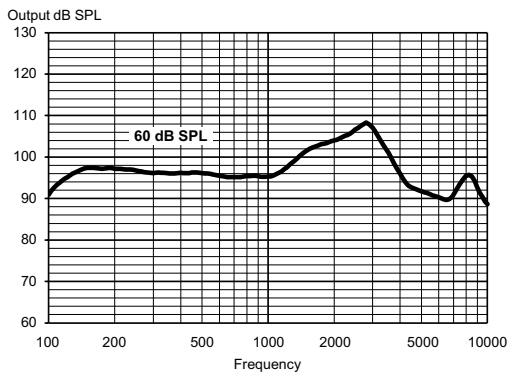

OUTPUT - 2CC COUPLER IEC 60118-7 / ANSI S3.22-2009

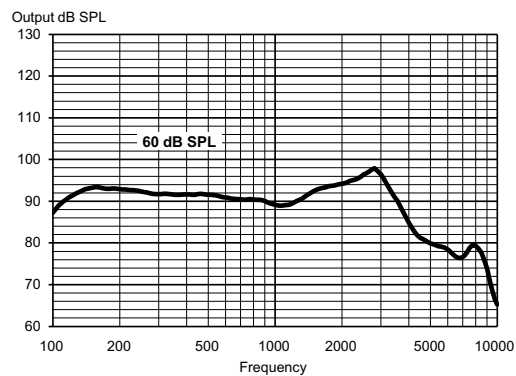

Technical data Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact GrandAudition.

		IEC 60118-0	IEC 60118-7 / ANSI S3.22-2009
OSPL90	1600 Hz Peak Average	118 dB SPL 124 dB SPL 118 dB SPL	109 dB SPL 114 dB SPL 111 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	102 dB SPL 108 dB SPL 98 dB SPL	93 dB SPL 98 dB SPL 93 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz Peak Average	63 dB 69 dB 64 dB	54 dB 59 dB 56 dB
Frequency range		100 Hz - 10000 Hz	100 Hz - 9000Hz
Harmonic distortion	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		22 dB SPL	22 dB SPL
Battery drain (stand by)		0.96 mA	0.96 mA
Battery drain		0.98 mA	1.00mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		90 (>75)	90 (>75)
Mobile phone immunity		IRIL: -33/-17/-18 dB SPL	U-rating: M4