


## HUIER RIC M-RECEIVER

Minimal to severe hearing losses



### Fitting range

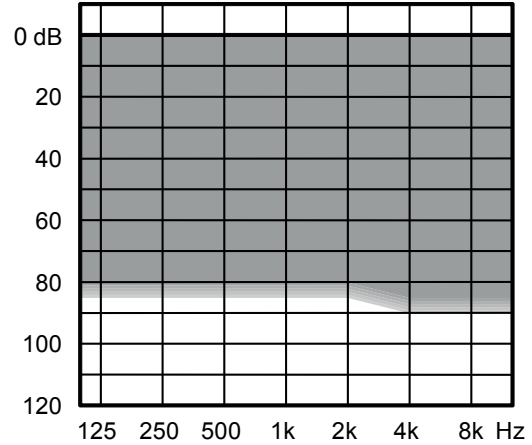


<b>Key Features</b>	<b>S9B</b>	<b>S8B</b>
Processing and fine-tuning channels	6	4
U platform	•	•
Preference control	•	•
Focus Mode	•	•
Noise Reduction	•	•
Sound Class Technology	3	1
HD Locator	6	Broadband
Programs	3	3
<b>Connectivity and wireless compatibility</b>		
App for iPhone and Android via COM-DEX	•	•
DEX assistive listening devices	CALL-DEX, UNI-DEX, COM-DEX, TV-DEX, RC-DEX, FM+ DEX, PHONE-DEX	

## TECHNICAL DATA


		<b>EAR SIMULATOR</b> IEC 60118-0:1983, + A1:1994	<b>2CC COUPLER</b> IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	118 dB SPL 124 dB SPL 118 dB SPL	109 dB SPL 114 dB SPL 111 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	102 dB SPL 108 dB SPL 98 dB SPL	93 dB SPL 98 dB SPL 93 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz Peak Average	63 dB SPL 69 dB SPL 64 dB SPL	54 dB SPL 59 dB SPL 56 dB SPL
Acoustic Frequency range		100 Hz - 10000 Hz	100 Hz - 9000 Hz
Harmonic distortion (Typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		22 dB SPL	22 dB SPL
Battery drain (stand by)		0.96 mA	0.96 mA
Battery drain*		0.98 mA	1.00 mA
Battery life / hours (Type 10 Zn-Air, 100 mAh)*		90 (>75)	90 (>75)
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -33/-17/-18 dB SPL	U-rating: M4

\*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


### MAXIMUM OUTPUT - EAR SIMULATOR

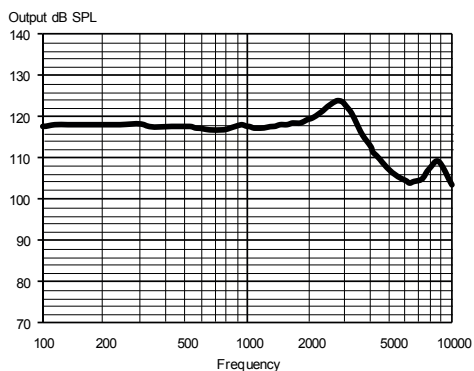

### MAXIMUM OUTPUT - 2CC COUPLER

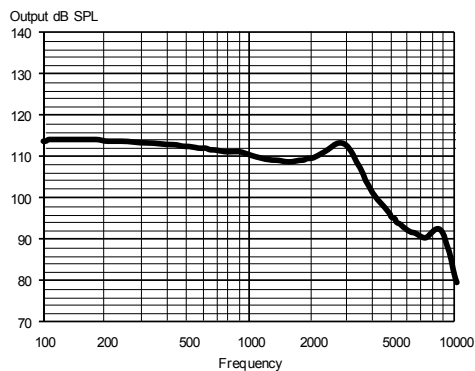

### OUTPUT - EAR SIMULATOR

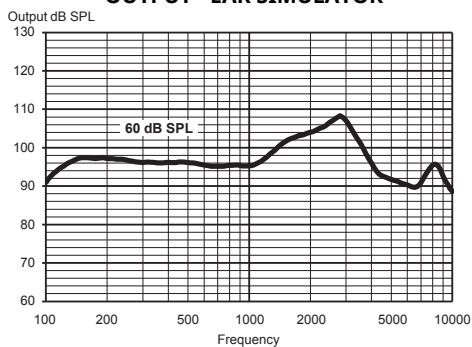

### OUTPUT - 2CC COUPLER

