


Minimal to severe hearing losses



Fitting range

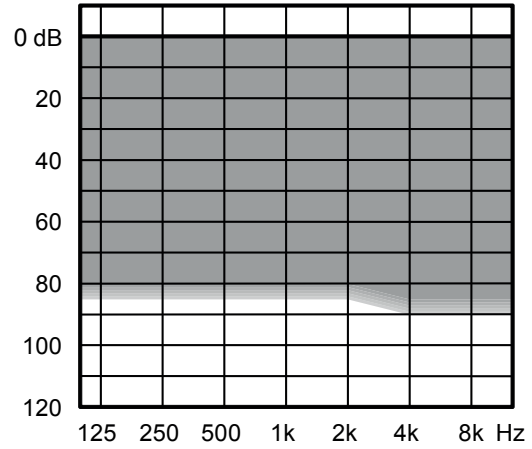

Key Features

Processing and fine-tuning channels

U platform

Preference control

Focus Mode

Noise Reduction

Sound Class Technology

HD Locator

Programs

S10B

10

•

•

•

•

5 (IE)

10

4

Connectivity and wireless compatibility

App for iPhone and Android via COM-DEX

•

DEX assistive listening devices


CALL-DEX, UNI-DEX, COM-DEX, TV-DEX, RC-DEX, FM+ DEX, PHONE-DEX

TECHNICAL DATA


		EAR SIMULATOR IEC 60118-0:1983, + A1:1994	2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	118 dB SPL 124 dB SPL 118 dB SPL	109 dB SPL 114 dB SPL 111 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	103 dB SPL 108 dB SPL 99 dB SPL	94 dB SPL 98 dB SPL 94 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz Peak Average	62 dB SPL 68 dB SPL 62 dB SPL	52 dB SPL 58 dB SPL 55 dB SPL
Frequency range		100 Hz - 9200 Hz	100 Hz - 8400 Hz
Harmonic distortion (Typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		21 dB SPL	21 dB SPL
Battery drain (stand by)		0.96 mA	0.96 mA
Battery drain		0.98 mA	1.00 mA
Battery life / hours (Type 312 Zn-Air, 145 mAh)		150 (>125) h	145 (>120)
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -36/-33/-32 dB SPL	U-rating: M4/T4

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


MAXIMUM OUTPUT - EAR SIMULATOR

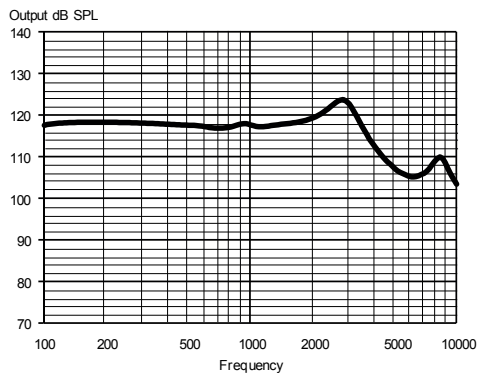


MAXIMUM OUTPUT - 2CC COUPLER

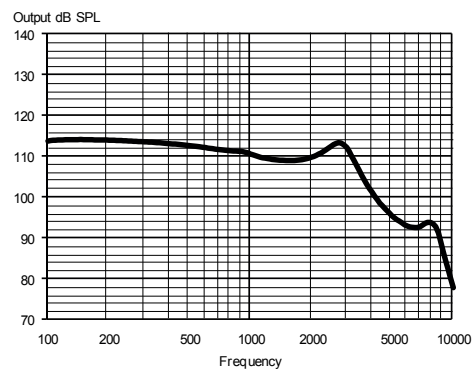

OUTPUT - EAR SIMULATOR

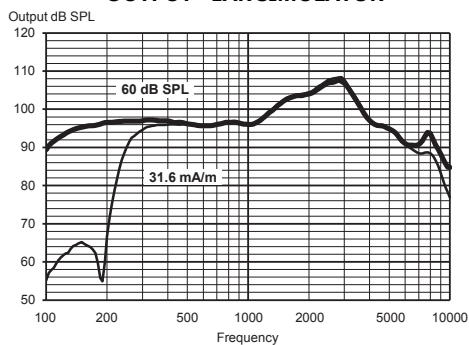

OUTPUT - 2CC COUPLER

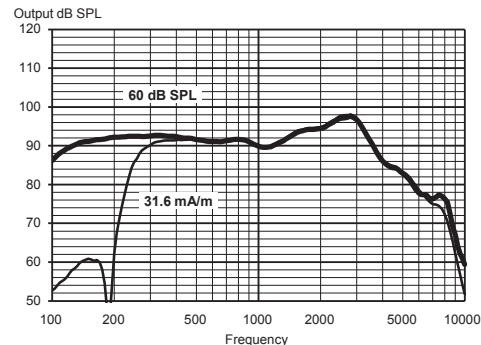

Do not modify this equipment without authorization of the manufacturer.