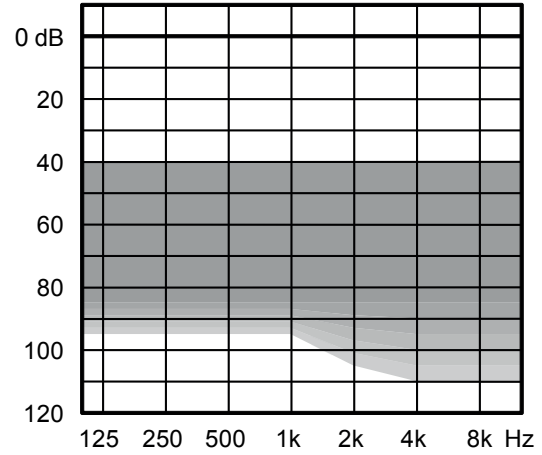


HUIER RIC P-RECEIVER

Moderate to severe-to-profound hearing losses


Fitting range

Key Features

Processing and fine-tuning channels

U platform

Preference control

Focus Mode

Noise Reduction

Sound Class Technology

HD Locator

Programs

S10B

10

•

•

•

•

5 (IE)

10

4

Connectivity and wireless compatibility

App for iPhone and Android via COM-DEX

•

DEX assistive listening devices


CALL-DEX, UNI-DEX, COM-DEX, TV-DEX, RC-DEX, FM+ DEX, PHONE-DEX

TECHNICAL DATA


		EAR SIMULATOR IEC 60118-0:1983, + A1:1994	2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	129 dB SPL 131 dB SPL 127 dB SPL	120 dB SPL 121 dB SPL 118 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	114 dB SPL 117 dB SPL 108 dB SPL	105 dB SPL 107 dB SPL 101 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz Peak Average	65 dB SPL 70 dB SPL 68 dB SPL	56 dB SPL 65 dB SPL 59 dB SPL
Frequency range		100 Hz - 6700 Hz	100 Hz - 6400 Hz
Harmonic distortion (Typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		20 dB SPL	22 dB SPL
Battery drain (stand by)		1.00 mA	1.00 m
Battery drain		1.05 mA	1.07 mA
Battery life / hours (Type 312 Zn-Air, 145 mAh)		140 (>115) h	135 (>115)
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -32/-29/-30 dB SPL	U-rating: M4/T4

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


MAXIMUM OUTPUT - EAR SIMULATOR

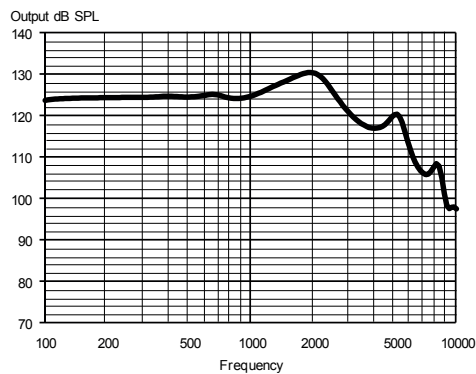

MAXIMUM OUTPUT - 2CC COUPLER

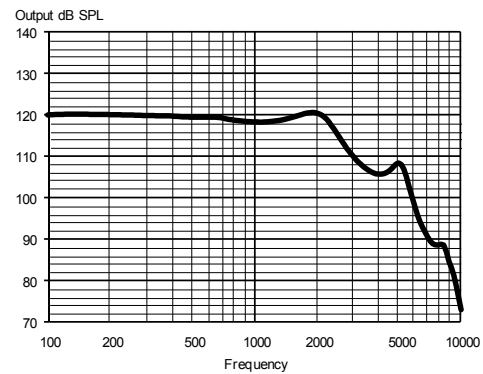

OUTPUT - EAR SIMULATOR

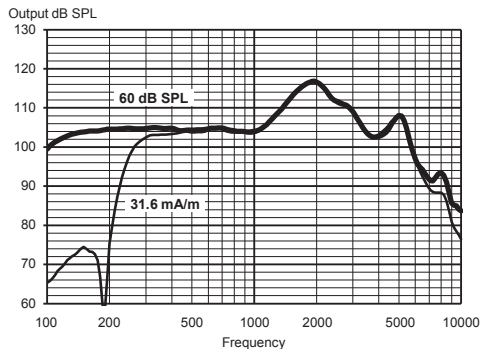

OUTPUT - 2CC COUPLER

