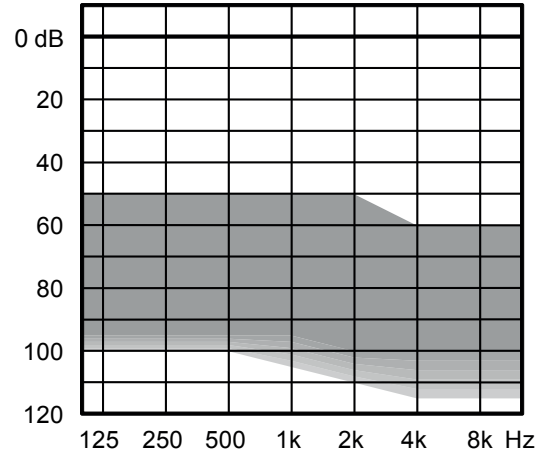


HUIER RIC HP-RECEIVER

Hearing loss up to severe-to-profound


Fitting range

Key Features

Processing and fine-tuning channels

U platform

Preference control

Focus Mode

Noise Reduction

Sound Class Technology

HD Locator

Programs

S10B

10

•

•

•

•

5 (IE)

10

4

Connectivity and wireless compatibility

App for iPhone and Android via COM-DEX

•

DEX assistive listening devices

CALL-DEX, UNI-DEX, COM-DEX, TV-DEX, RC-DEX, FM+ DEX, PHONE-DEX


TECHNICAL DATA

		EAR SIMULATOR IEC 60118-0:1983, + A1:1994	2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	130 dB SPL 137 dB SPL 132 dB SPL	120 dB SPL 132 dB SPL 126 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	115 dB SPL 121 dB SPL 113 dB SPL	105 dB SPL 112 dB SPL 109 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz Peak Average	76 dB SPL 84 dB SPL 75 dB SPL	67 dB SPL 74 dB SPL 70 dB SPL
Telecoil output (Input 31.6 mA/m)		115 dB SPL 121 dB SPL 113 dB SPL	105 dB SPL 112 dB SPL 109 dB SPL
Acoustic Frequency range		100 Hz - 6000 Hz	100 Hz - 5800 Hz
Harmonic distortion (Typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		21 dB SPL	21 dB SPL
Battery drain (stand by)		1.01 mA	1.01 mA
Battery drain*		1.08 mA	1.12 mA
Battery life / hours (Type 312 Zn-Air, 170 mAh)*		155 h	150 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -33/-9/-3 dB SPL	U-rating: M4/T4


*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.

Additional Technical data: Protection class IP68


MAXIMUM OUTPUT - EAR SIMULATOR

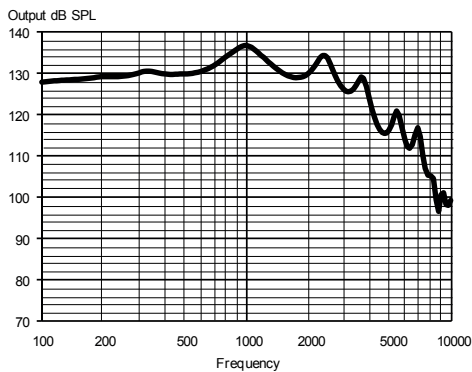

MAXIMUM OUTPUT - 2CC COUPLER

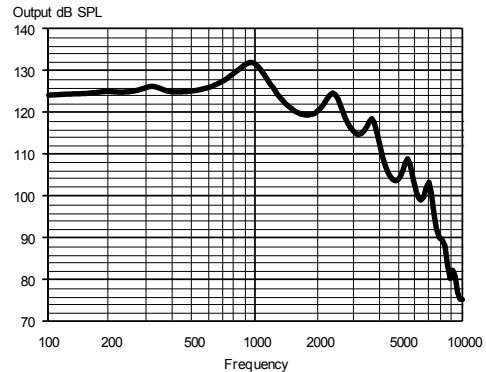

OUTPUT - EAR SIMULATOR

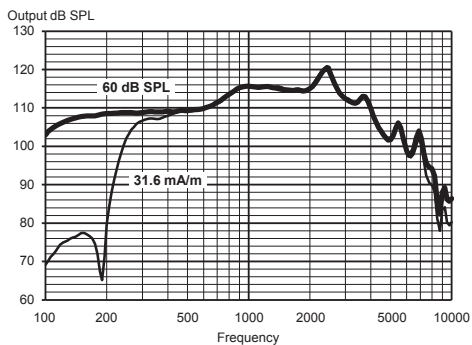

OUTPUT - 2CC COUPLER

