


VOGUE MINI-RIC WITH SOUNDSENSE TECHNOLOGY



The Vogue MINI-RIC is based on the Vogue E-platform, with an Fluid Sound Controller that handles automatic processing more accurately and faster than before. Vogue MINI-RIC is on of the first hearing aids to use SoundSense Adapt to learn from the users' preferences and help guide them to a better, more personalised sound.

- Multiple wireless connectivity via WidexLink technology and TONELINK App
- Compatible with the DEX assistive listening devices
- 4 performance levels E440/E330/E220/E110
- Uses an M-receiver
- Uses a size 10 battery
- Protection class IP68
- Minimal to severe hearing losses

SUGGESTED FITTING RANGE

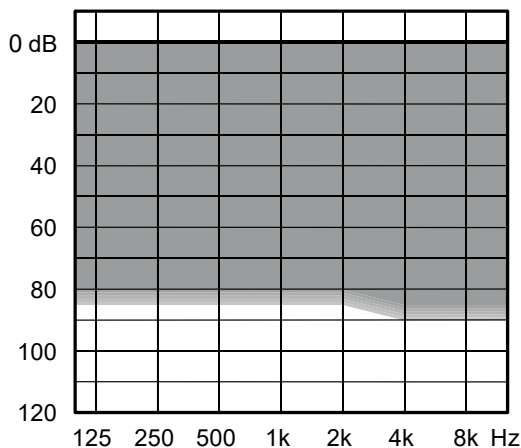

STANDARD TECHNOLOGY

- E-platform with Fluid Sound Controller
- Improved open-fit Widex rationales
- Acclimatisation rationales
- Power Saver IV technology for low current consumption

KEY FEATURES	E440	E330	E220	E110
Performance	xxxxxx	xxxxx	xxxx	xx
Processing and fine-tuning channels	15	12	10	6

CONNECTIVITY

WidexLink to DEX assistive listening devices*	E440	E330	E220	E110
	•	•	•	•

APPS FOR IOS AND ANDROID


APP	E440	E330	E220	E110
TONELINK App	•	•	•	•
COM-DEX App	•	•	•	•

FEATURES


FEATURE	E440	E330	E220	E110
Adaptation manager	•	•	•	•
Fluid Sound Analyser (sound classes)	11 (IE)	7 (IE)	4	3
Programs	5	4	3	3
Smartwind Manager	•			
High-frequency boost	•			
Speech Enhancer RT	RT/IE	IE		
Digital Pinna	•	•		
HD Locator	•	•	•	
TruSound Softener	•	•	•	
SoundSense Adapt	•	•	•	
Preference Control	•	•	•	•
Soft-level noise reduction	•	•	•	•
Noise Reduction	•	•	•	•
ZEN IE	•	•	•	•
Audibility Extender	•	•	•	•

*Also includes DEX assistive listening devices: CALL-DEX, TV-DEX, COM-DEX, UNI-DEX, RC-DEX, FM+ DEX, PHONE-DEX


MAXIMUM OUTPUT - EAR SIMULATOR

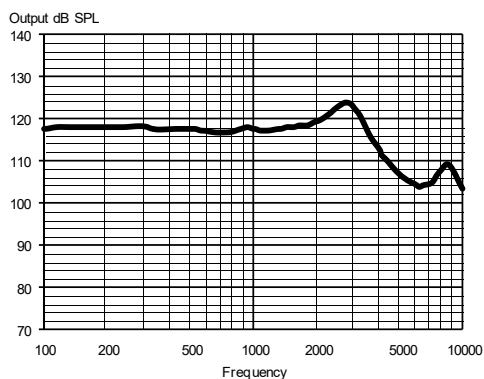


MAXIMUM OUTPUT - 2CC COUPLER

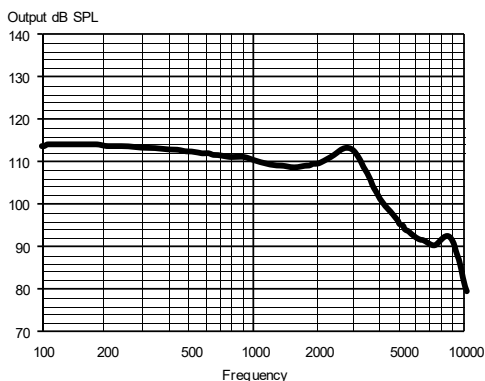

OUTPUT - EAR SIMULATOR

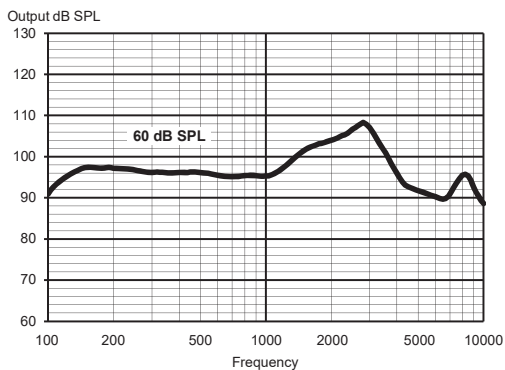

OUTPUT - 2CC COUPLER

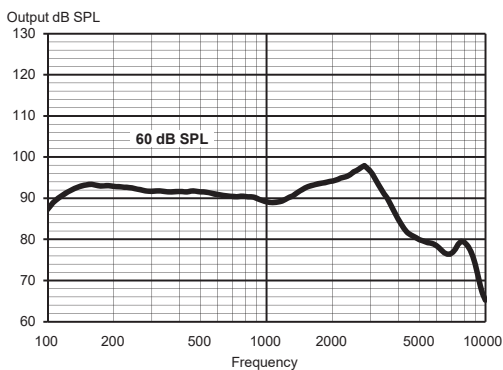

Technical data:

Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact HearBuy

		EAR SIMULATOR IEC 60118-0:1983 + A1:1994	2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz	118 dB SPL	109 dB SPL
	Peak	124 dB SPL	114 dB SPL
	Average	118 dB SPL	111 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz	102 dB SPL	93 dB SPL
	Peak	108 dB SPL	98 dB SPL
	Average	98 dB SPL	93 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz	63 dB	54 dB
	Peak	69 dB	59 dB
	Average	64 dB	56 dB
Acoustic frequency range		100 Hz - 10000 Hz	100 Hz - 9000 Hz
Harmonic distortion (typical)	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		22 dB SPL	22 dB SPL
Battery drain (standby)		0.98 mA	0.98 mA
Battery drain*		1.00 mA	1.02 mA
Battery life (Type 10 Zn-Air, 100 mAh)*		100 h	100 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -39/-7/-4 dB SPL	U-rating: M4

* Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.

Do not modify this equipment without authorization of the manufacturer.