


VOGUE CIC TR WITH SOUNDSSENSE TECHNOLOGY



The Vogue CIC is based on the Vogue E-platform, with an Fluid Sound Controller that handles automatic processing more accurately and faster than before. Vogue CIC is one of the first hearing aids to use SoundSense Adapt to learn from the users' preferences and help guide them to a better, more personalised sound.

- Multiple wireless connectivity via WidexLink technology and TONELINK App
- Compatible with the DEX assistive listening devices
- 4 performance levels E440/E330/E220/E110
- Uses a size 10 battery
- Protection class IP68
- Minimal to moderately severe hearing losses

SUGGESTED FITTING RANGE

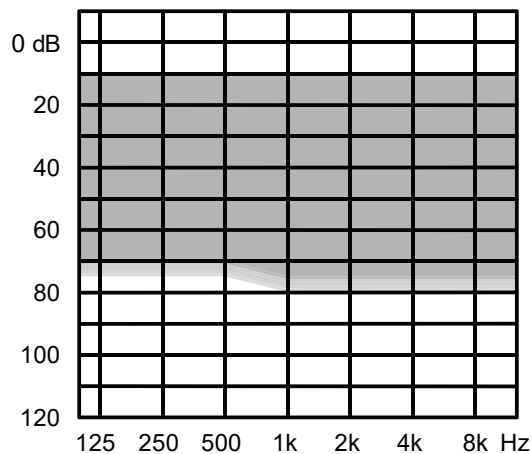

STANDARD TECHNOLOGY

- E-platform with Fluid Sound Controller
- Improved Widex rationales
- Acclimatisation rationales
- Power Saver IV technology for low current consumption

| KEY FEATURES | E440 | E330 | E220 | E110 |
|-------------------------------------|--------|-------|------|------|
| Performance | xxxxxx | xxxxx | xxxx | xx |
| Processing and fine-tuning channels | 15 | 12 | 10 | 6 |

CONNECTIVITY

| WidexLink to DEX assistive listening devices * | E440 | E330 | E220 | E110 |
|--|------|------|------|------|
| | • | • | • | • |

APPS FOR IOS AND ANDROID


| APP | E440 | E330 | E220 | E110 |
|--------------|------|------|------|------|
| TONELINK App | • | • | • | • |
| COM-DEX App | • | • | • | • |

FEATURES


| FEATURE | E440 | E330 | E220 | E110 |
|--------------------------------------|------------------------|-------|------|------|
| Adaptation manager | • | • | • | • |
| Fluid Sound Analyser (sound classes) | 11(IE) | 7(IE) | 4 | 3 |
| Programs | 5 | 4 | 3 | 3 |
| High-frequency boost | • | | | |
| Speech Enhancer RT | RT/IE | IE | | |
| TruSound Softener | • | • | • | |
| SoundSense Adapt | • (via DEX and/or APP) | | | |
| Preference control | • | • | • | • |
| Soft-level noise reduction | • | • | • | • |
| Noise Reduction | • | • | • | • |
| ZEN IE | • | • | • | • |
| Audibility Extender | • | • | • | • |

*Also includes DEX assistive listening devices: CALL-DEX, TV-DEX, COM-DEX, UNI-DEX, RC-DEX, FM+ DEX, PHONE-DEX


MAXIMUM OUTPUT - EAR SIMULATOR

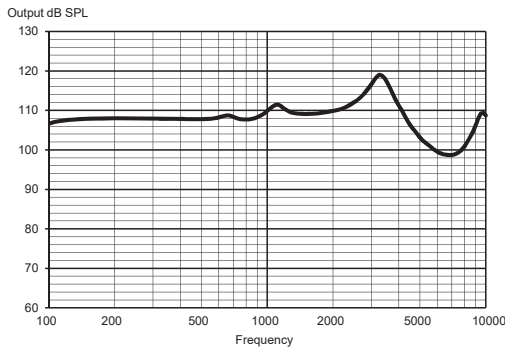


MAXIMUM OUTPUT - 2CC COUPLER

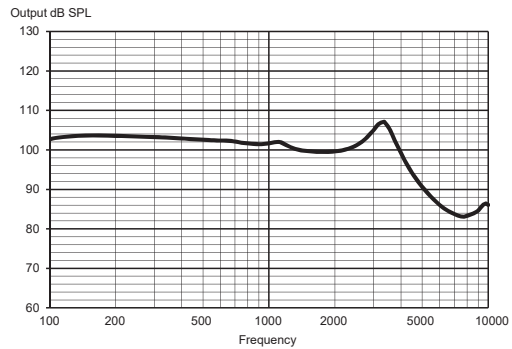

OUTPUT - EAR SIMULATOR

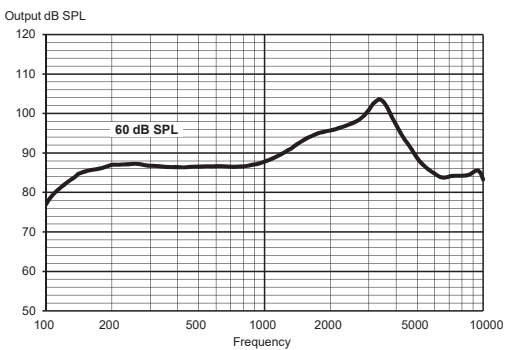

OUTPUT - 2CC COUPLER

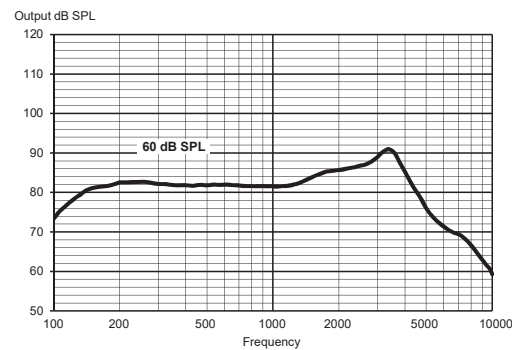

Technical data:

Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard, and with a 5 x 1.55mm tube. For further information, please contact HearBuy

| | | EAR SIMULATOR IEC 60118-0:1983 + A1:1994 | 2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014 |
|---|---------|---|--|
| OSPL90 | 1600 Hz | 109 dB SPL | 100 dB SPL |
| | Peak | 118 dB SPL | 107 dB SPL |
| | Average | 109 dB SPL | 101 dB SPL |
| Acoustic output (Input 60 dB SPL) | 1600 Hz | 94 dB SPL | 84 dB SPL |
| | Peak | 103 dB SPL | 91 dB SPL |
| | Average | 90 dB SPL | 84 dB SPL |
| Full-on gain (Input 50 dB SPL, Compass Full-on gain) | 1600 Hz | 58 dB | 49 dB |
| | Peak | 60 dB | 53 dB |
| | Average | 57 dB | 49 dB |
| Acoustic frequency range | | 100 Hz - 10000 Hz | 100 Hz - 8600 Hz |
| Harmonic distortion (typical) | 500 Hz | <2% | <2% |
| | 800 Hz | <2% | <2% |
| | 1600 Hz | <2% | <2% |
| Equivalent input noise | | 26 dB SPL | 26 dB SPL |
| Battery drain (standby) | | 0.93 mA | 0.93 mA |
| Battery drain* | | 0.95 mA | 0.97 mA |
| Battery life (Type 10 Zn-Air, 100 mAh)* | | 105 h | 105 h |
| Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011) | | IRIL: -38/-31/-26 dB SPL | U-rating: M4 |

*Battery life in real-life situations depends among other things on the hearing aid features used, and the quality of the battery used.

Do not modify this equipment without authorization of the manufacturer. ---